

IO-PCE9710-GLAN

PCI Express 10Gigabit Ethernet Card



• Feature

- PCI Express Rev 2.0 specification x4,x8,x16 Interface
- NBASE-T Alliance draft specification compliant
- 10G/5G/2.5G/1000M/100M auto negotiation support
- Supports Jumbo frame (9K)
- Supports RFC2819 RMON MIB statistics
- Supports IEEE 802.3ad Link Aggregation.
- Full IEEE Std 802.3ae Compliant
- Supports IEEE 802.3az (EEE)
- Supports IEEE 802.1q VLAN
- Supports Multicast
- Operating Temperature:0°C to 70°C
- Storage Temperature:-40°C to 85°C
- Power consumption (Full bidirectional traffic, 100m cable):
 - 10G speed:6.1W /5G speed:3.6 W
 - 2.5G speed:3.0W /1G speed:2.7W /100M speed:2.5W


CONTACT US

Address: Room 2113-2114,Huaneng Building,2066 Shennan Road,Shenzhen,China
Telephone: 0755-88851458

• Specification

Bus Type	PCI Express .
Chipset ID	TehutiNetworks TN4010
Number of Ports	1 Port
Transfer Rate	10/100/1000/10000 Mbps
Environment	Operating Temperature: 0°C to 70°C Storage Temperature: -40°C to 85°C
OS Compatibility	Windows Server 2008R2,2012R2,2016 /Windows 7,8,8.1,10 32 and 64-bit systems /Linux 2.6, Linux 3.x, Linux 4.x 32 and 64-bit systems/vmware® ESXi 6.0, ESXi 6.5/Microsoft Hyper-V/Apple macOS 10.12 or later

Dimension-----

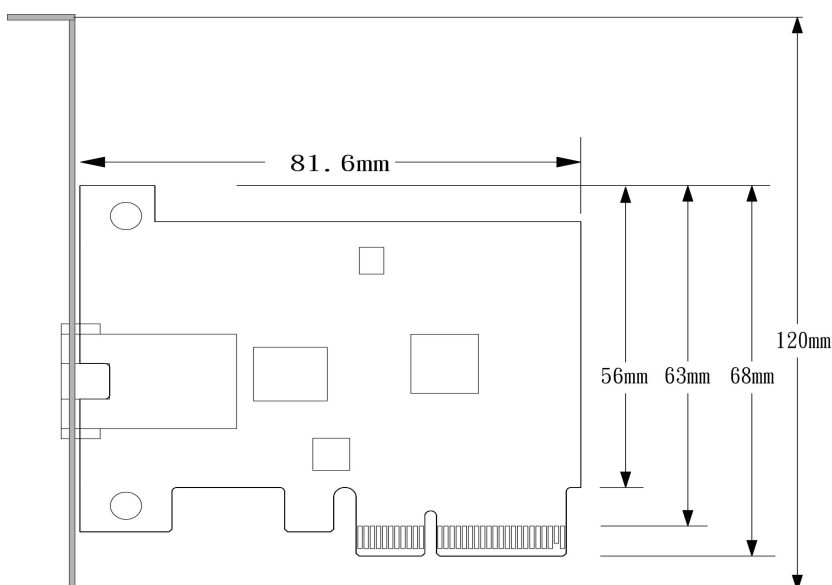

• Accessories

- 1 x PCI Express 10 Gigabit Ethernet Network Card
- 1 x User Manual
- 1 x Low Profile

CONTACT US

Address: Room 2113-2114,Huaneng Building,2066 Shennan Road,Shenzhen,China
Telephone: 0755-88851458